


# DHI-ITSXS-1301 series

## Outdoor Guidance Screen

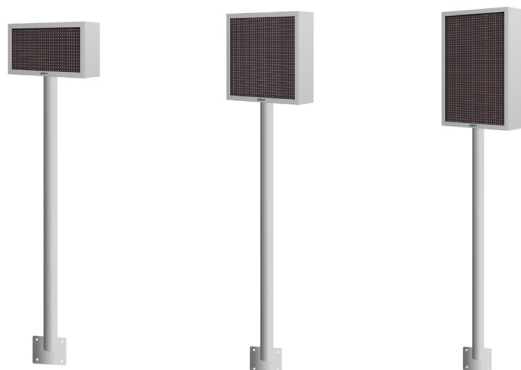

- Providing three layers display.
- Support the display of letters, numbers, arrows and handicap parking signs.
- Support high-brightness display and adjustable brightness.
- Controls multiple screens at the same time and supports displaying in partitions.
- Modifies IP and updates the program with the configuration application.

### System Overview

The DHI-ITSXS-1301 outdoor serise product is used in the outdoor parking area. Guide the vehicle to find the available parking space quickly and improve the parking efficiency.

### Scene

Applicable to malls, hospitals, schools, residential areas, office buildings, stations and parking lots.

### Technical Specification

#### Basic

Monitor	LED (Display in red, green, and yellow colors)
Dimensions	320 mm × 160 mm (12.60" × 6.30") (L × W) 320 mm × 320 mm (12.60" × 12.60") (L × W) 320 mm × 480 mm (12.60" × 18.90") (L × W)
Display Content	Chinese characters, letters, numbers, arrows, the handicap parking sign, and more
Pixels Configuration	1R1PG
Resolution	512 dots (32 × 16); 1 line; pixel pitch: 10 mm (0.39") 1024 dots (32 × 32); 2 line; pixel pitch: 10 mm (0.39") 1536 dots (32 × 48); 3 lines; pixel pitch: 10 mm (0.39")
Service Life	100,000 hours
Screen Brightness	≥ 6000 cd/m <sup>2</sup> (adjustable)
<b>Port</b>	
Network Port	1 × 100 Mbps Ethernet port (RJ-45)

### General

Power Supply	100 V–240 V AC
Power Consumption	30 W, 60W, 90W
Operating Temperature	–30 °C to +70 °C (–22 °F to +158 °F)
Operating Humidity	10%–90% (non-condensing)
IP Rating	IP54
Product Dimensions	362 mm × 110 mm × 202 mm (14.25" × 4.33" × 7.95") (L × W × H) 362 mm × 110 mm × 362 mm (14.25" × 4.33" × 14.25") (L × W × H) 362 mm × 110 mm × 522 mm (14.25" × 4.33" × 20.55") (L × W × H)
Net Weight	3 kg (6.61 lb), 6 kg (13.23 lb), 9 kg (19.84 lb)
Gross Weight	3.5 kg (7.71 lb), 7 kg (15.43 lb), 10.5 kg (23.15 lb)
Installation	Pole mount; Pole mount bracket

### Ordering Information

Type	Model	Description
Outdoor guidance screen	DHI-ITSXS-1301-12	Outdoor guidance screen (one way)
	DHI-ITSXS-1301-22	Outdoor guidance screen (two ways)
	DHI-ITSXS-1301-32	Outdoor guidance screen (three ways)
Accessories	ITSXS-1301-0F	Pole mount
	ITSZJ-4201	Pole mount bracket

Installation

Dimensions (mm[inch])

