


FIREscape EL-PM

Single Phase Under Voltage Relay

Features

- ▶ 17.5mm DIN rail mount
- ▶ Fixed under voltage trip level @ 75%
- ▶ Response time <300mS
- ▶ Intelligent LED indication for supply and relay status
- ▶ Microprocessor Based (self checking)

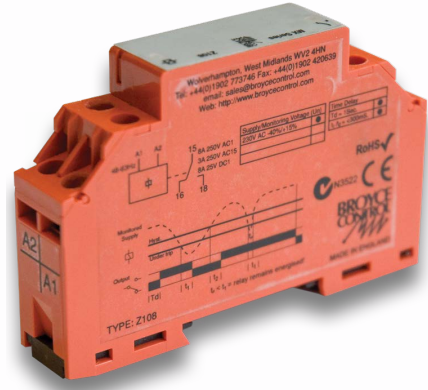

Description

EL-PM monitors normal house lighting supply and changes state under 300mS on detection of house supply failure.

Interface with FIREscape is achieved via the EL-IO or direct connection to the FIREscape line.

Specification

Monitoring voltage	240V AC
Trip Level	Fixed at 75% of Un
Time Delay	<300ms
Weight (g)	60
Terminal Conductor Size	2.5mm Solid / Stranded