

Rilevatore infrarosso passivo con telecamera day-night collegabile con balun attivo integrato

Passive infrared detector with day-night camera connected with active impedance adapter

ZEFIRO
CAM



TELECAMERA A COLORI/ COLOR CAMERA

Telecamera pin-hole a colori, day-night.

Pin-hole day-night color camera.

1/2.8" Sony Exmor CMOS Sensor (2.43megapixel)

Video output:1080P AHD (Default)/HD-TVI/CVI/CVBS (1280H)_1000TVL Day & Night: Auto/color/B&W/EXT



ASCOLTO AMBIENTALE/ ENVIRONMENTAL LISTENING

Microfono a bordo per ascolto ambientale (optional).

Onboard microphone for listening environment (optional).




BALUN ATTIVO INTEGRATO

INTEGRATED ACTIVE BALUN

Adattatore di impedenza attivo che consente, tramite morsettiera dedicata, il collegamento della telecamera attraverso l'utilizzo di cavi UTP.

Active impedance adapter that allows, through dedicated terminal block, connect the camera with UTP cables.

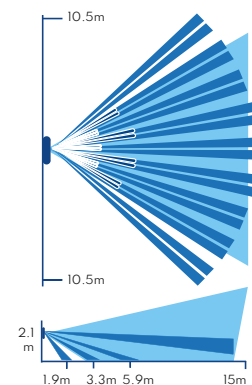

CAVI DI COLLEGAMENTO PROPOSTI

Soluzione 1

RG179+4 75Ohm+ 4x0,22 6mm VIDEO + ANTIFURTO

Soluzione 2

RG179 75 Ohm 2,0mm VIDEO

RG174 50 Ohm 2,8mm AUDIO

Cw0422 4x0, 22 3,5mm

Le funzioni della sezione INFRAROSSO dello ZEFIRO CAM

coincidono con quelle dello ZEFIRO IR

The ZEFIRO CAM has the same features for Infrared section of ZEFIRO IR

EN 50131-2-2
Grade 2 Class II
Sezione Infrarosso

