

#### Outdoor 5G Wireless Transmission Device



#### **Features**

- Supports outdoor temperature: -30°C~70°C, industrial design;
- Wireless coverage recommended range≤3km;
- · Radio-frequency mouth anti-thunder reaches 15KV ESD;
- Supports auto ranging function, real time display straight line distance between client and base station;
- · Supports device auto reboot function;
- 5G mode support 5745~5825MHz(extended range: 4920~6100MHz);
- Supports flow control, effectively control base station/client input/output flow control;
- Supports VLAN partition, realize virtual local network function, control broadcast storm
- Supports 802.1x authentication method, effectively guarantee client access control, provide access safety.
- Supports client priority setting, better dispatch each client when the mode is point-to-multipoint
- Supports multiple channel option (5M/10M/20M/40M), effectively improve anti-interference and penetration capability
- Support standard PoE power supply (IEEE802.3at, PoE+)





# **Specifications**

| Model                            | DH-PFM881E  |
|----------------------------------|---|
| Wireless Features                |   |
| Wireless Standard                | IEEE802.11 a/n/ac                                       |
| Working Frequency                | 5745~5825 MHz (extended range: 4920~6100MHz)            |
| Wireless Speed                   | 867Mbps   |
| Modulation Mode                  | OFDM  |
| Antenna                          | 18dBi (Directional)                                     |
| Output Power                     | 24dBm   |
| Receiving Sensitivity            | 11a: 1Mbps -93 dBm 54 Mbps -72dBm 6Mbps -91 dBm         |
|                                  | 11n: MCS0 -85 dBm MCS7 -67dBm                           |
| Transmission Distance            | 11ac: MCS0 -85 dBm MCS9 -60dBm                          |
| Transmission Distance            | 0-3km (recommended)                                     |
| Wireless Direction Angle         | Horizontal 17°, vertical 17°                            |
| Hardware                         | 4*DaE D 145 (IEEE002 2at DaE )                          |
| Power                            | 1*PoE RJ45 (IEEE802.3at, PoE+),<br>1*LAN RJ45(1000Mbps) |
| Power Consumption                | ≤25W  |
| Ethernet Port                    | 2×10/100M/1000MBase-TX (Cat. 5/5E, RJ-45)               |
| Indicator Light                  | N/A   |
| Working Temperature              | -30°C∼+70°C   |
| Storage Temperature              | -30℃~+80℃   |
| Working Humidity                 | 5%~95%RH(no condensation)                               |
| Equipment Dimension              | 200mm*200mm*50mm  |
| Equipment Weight                 | 1.05kg  |
| Software                         | , ,   |
| Encryption Type                  | 802.1x/WPA-PSK/WPA2-PSK                                 |
| Network Mode                     | Route/Network Bridge                                    |
| Working Mode                     | Access Point/Client/WDS AP/WDS client/WDS Repeater      |
| Security Mechanism               | IP/MAC address filtering, hide network name             |
| Network Protocol                 | TCP/UDP/ARP/ICMP/DHCP/HTTP/NTP                          |
| TDMA                             | Support   |
| Auto ACK Timing Adjustment       | Support   |
| Management and Log               | NTP, Syslog, Telnet, AC, SNMP                           |
| Webpage Configuration Management | Web, AC, SNMP   |
| Firmware Update                  | Web, AC   |
| Bandwidth Flexible Configuration | 10M/20M/40M/80M   |

# **Dimensions (mm)**



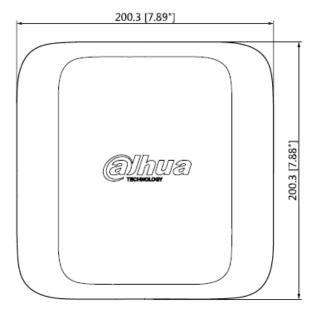



### **Application Scenarios**


- 1. Safe towns, safe construction sites, safe scenic area and wireless HD video monitoring of the bus stations, etc.
- 2. Playground, ranch, uptown crossroad, orchard, park and other no blocking scenarios.

## **Networking Mode**

#### 1. Point-to-Point Networking


For point-to-point communication, generally a DH-PFM881 is set as access point, and another DH-PFM881E is set as client, as demonstrated below.



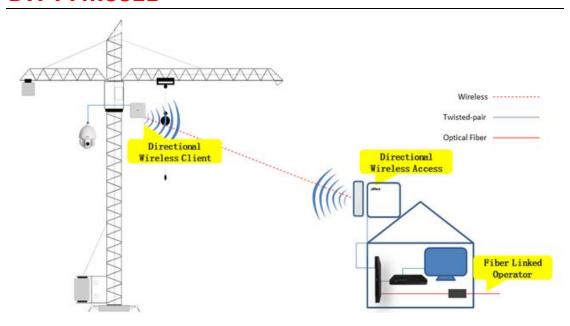

#### 2. Point-to-Multipoint Networking

For point-to-multipoint communication, generally adopt DH-PFM880E as server, and it is set as access point (different "frequency/channel" should be set when there are several access points in order to avoid interference), DH-PFM881E is set as client, as demonstrated below.

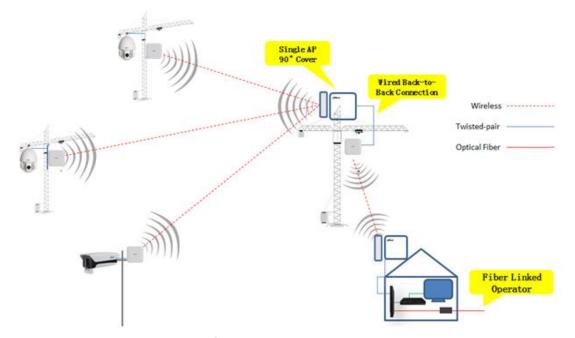


#### 3. Back-to-Back Angle Adjustment Network

For wireless coverage blind angle, cable connection for double devices is




recommended, which can solve the problem of angle by adjusting two directions respectively; the back-to-back connection for double devices can also be applied to long-distance repeater, as demonstrated below.

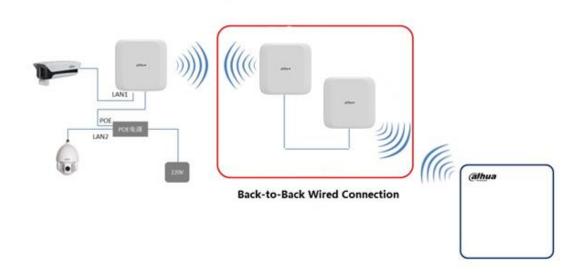

### **Connection Mode**

# **alhua**TECHNOLOGY

## **DH-PFM881E**

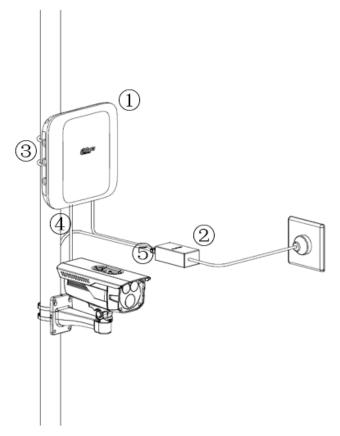

- 1. Wireless transmission device
- 2. PoE adapter
- 3. Brackets
- 4. LAN2 port is used to connect to IP cameras or other devices
- 5. LAN port in PoE adapter is used to connect to IP cameras or other devices

#### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

\*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.